

Product information Neximo H1 LED6200nw ETDD +ActiM I2 TOC: 59 012 51




Application areas

For prestigious office lighting, especially the work zone-oriented lighting of single or double workstations in offices.

Optical system


Direct-indirect distribution. 58 high power LEDs, 36 with indirect distribution, 22 with direct distribution, integrated in separate high performance precision lenses. LED with constant colour stability and colour rendering index of $R_a > 80$, guaranteed over complete service life. Neutral white light colour, colour temperature 4000 K, total luminous flux 6200 lm, connected load 112 W. Harmonious light appearance via luminous structure between precision lenses.

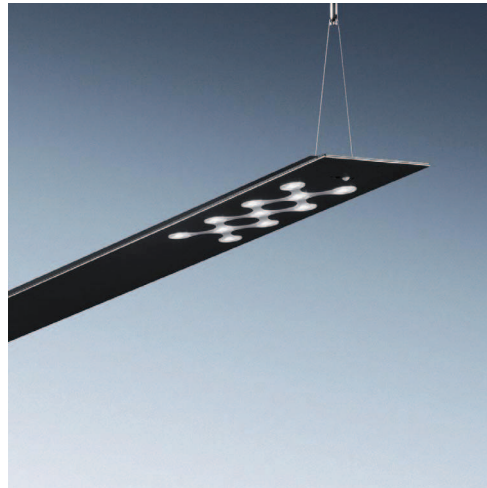

Colour	...I2
Weight	7.1 kg
Degree of protection	IP 20
Safety class	I
Hot wire test	650 ° C
Shock resistance	0,2 J
LFEC	F0
Cibse	BZ 3
LOR	1,00

Luminaire body

Consisting of two extruded aluminium profiles, very slender appearance due to cross-section tapering upwards, black fine powder-coated, construction height 28 mm. Die-cast end caps for homogenous end appearance. Pre-assembled 1-point wire suspension in Y-form and transparent cable for suspension lengths to 1500 mm.

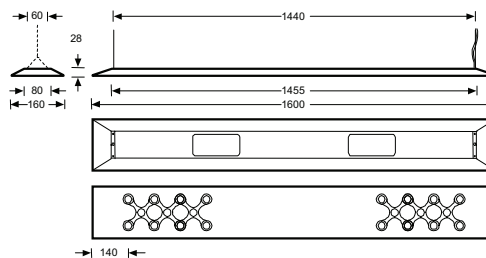

Electrical version

Electronic power supply integrated within luminaire. With digitally dimmable electronic transformer (DALI) and integrated ActiLume controller and sensor unit for daylight-dependent control and presence detection.

available accessories

TOC:	article
46 017 00	ZAA/01
46 018 00	ZAA/03
46 917 00	ZAE/01 Ans-Dose eckig vp
46 918 00	ZAE/03